
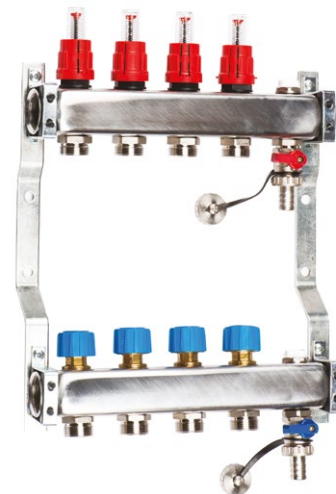


## TECHNICAL DATA:

### INOX STEEL MANIFLOD FOR UNDERFLOOR HEATING – STANDARD CR+1

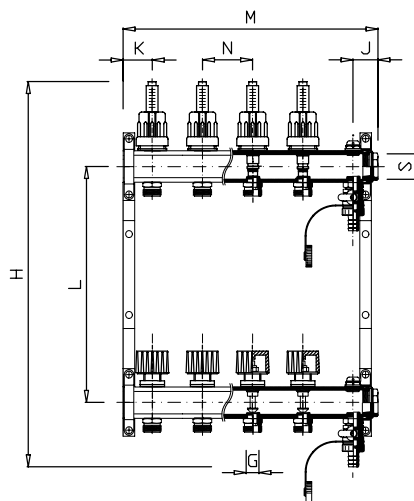

CHARACTERISTIC/ DIMENSIONS (mm)										PACKING SYSTEM		
INDEX	HEATING LOOPS	DIAMETER OF ACCESSORIES CONNECTOR	BEAM SPACING	H	M	N	K	DIAMETER OF BEAM PORT	J	NET WEIGHT/ PCS (g)	SINGLE PACK	POLLET
F-2063413	2	½"	235/210	409	175	50	25	1"	28	1910	1	100
F-2063420	3	½"	235/210	409	225	50	25	1"	28	2330	1	100
F-2063437	4	½"	235/210	409	275	50	25	1"	28	2750	1	100
F-2063444	5	½"	235/210	409	325	50	25	1"	28	3130	1	60
F-2063451	6	½"	235/210	409	375	50	25	1"	28	3540	1	60
F-2063468	7	½"	235/210	409	425	50	25	1"	28	3960	1	60
F-2063475	8	½"	235/210	409	475	50	25	1"	28	4360	1	48
F-2063482	9	½"	235/210	409	525	50	25	1"	28	4780	1	48
F-2063499	10	½"	235/210	409	575	50	25	1"	28	5200	1	48
F-2063505	11	½"	235/210	409	625	50	25	1"	28	5610	1	48
F-2063512	12	½"	235/210	409	675	50	25	1"	28	6020	1	48